


## DUCT MOUNTED AIRFLOW MEASUREMENT STATIONS


Integral Flow Straightener, Ideal for Turbulent Measuring Conditions

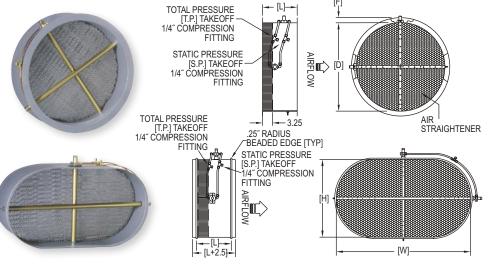

DIMENSIONS - CIRCULAR FLANGE									
Station Size "D"	Flange Thickness	-	Casing Length "L"						
8" - 15"	.064"		8″						
16" - 44"	.064"	1-1/2"	8″						
45" - 72"	.188″	1-1/2"	10″						
73" and over	.188″	2"	12″						

DIMENSIONS	DIMENSIONS - OVAL FLANGE (OPTIONAL)									
Station Width "W"	_	Flange Size	*Casing Length "L"							
Up to 44" Over 44"	.064"	1-1/2"	8″							
Over 44"	.188″	1-1/2"	10″							
*All oval flow stations without flange have a										
casing length of 8".										





DIMENSIONS - RECTANGULAR FLANGE									
Station Size "H" or "W"	Flange Size "F"								
8" - 72" 73" and over	1-1/2" 2"								

The Series STRA Duct Mounted Airflow Measurement Stations utilize an airflow averaging element generating a velocity pressure signal similar to the orifice, venturi, and other primary elements. Single or multiple airflow elements are factory mounted and pre-piped in a casing designed for flanged connection to the ductwork.

Multiple elements are joined together for connection to a differential measurement device (gage, transmitter, etc.) for flow measurement and indication purposes. It has been developed with a honeycomb airflow straightening section for use in duct systems having highly turbulent conditions at the point of measurement.


### BENEFITS/FEATURES

- Honeycomb airflow straightening section with 1/2 opening by 3"depth
- Low signal-to-noise ratio
- Factory mounted and pre-piped in a flanged duct section (casing)
- Standard construction includes galvanized casing and 6063-T5 anodized aluminum flow sensors
- Standard airflow stations can be operated (in air) continuously in temperatures up to 350°F or intermittently in temperatures up to 400°F

#### **APPLICATIONS**

- · Building air intake and exhaust flow rate measurement
- · HVAC air flow measurement

#### Circular Models



#### SPECIFICATIONS

**Accuracy:** Within 2% of actual flow when installed in accordance with published recommendations.

K Factor: 0.97.

Velocity Range: 100 to 10,000 FPM (0.51 to 51 m/s).

Wetted Materials: Elements: 6063-T5 anodized aluminum; Casings: 16 ga G90


galvanized steel, 3003 aluminum air flow straightener.

Temperature Limits: Galvanized casings and aluminum elements 350°F (177°C) continuous operation (in air), 400°F (204°C) intermittent operation (in air).

Humidity Limits: All airflow stations 0 to 100% non condensing.

Process Connections: 1/4" compression fittings.

#### Rectangular or Oval Models



R – Rectangular O – Oval

IM – Internal pressure connectionsF – Flange for oval mount station

**Note:** When ordering rectangular or oval flow stations, pressure taps will always be located on the longer of the two dimensions.

\*Metric dimensions available upon request



# DUCT MOUNTED AIRFLOW MEASUREMENT STATIONS Integral Flow Straightener, Ideal for Turbulent Measuring Conditions

MODEL	MODEL CHART - SERIES STRA RECTANGULAR OR OVAL														
Size	8″	10"	12″	14"	16″	18″	20″	22"	24"	26″	28″	30″	32″	34″	36″
8″	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
10″		Х	Х	Х	Х	Х	Х	X	Х	Х	Х	Х	Х	Х	Х
12″			Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
14"				Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
16″					Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
18″						Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
20″							Х	X	Х	Х	Х	Х	Х	Х	Х
22″								Х	Х	Х	Х	Х	Х	Х	Х
24"									Х	Х	Х	Х	Х	Х	Х
26″										Х	Х	Х	Х	Х	Х
28″											Х	Х	Х	Х	Х
30″												Х	Х	Х	Х
32″													Х	Х	Х
34"														Х	Х
36″															Х
Note: W	hen orderi	ng rectan	gular or ov	val flow st	ations, pre	essure tap	s will alwa	ays be loc	ated on th	e longer o	of the two	dimensior	ıs.		

Size	40"	44"	48″	52"	56"	60″	66″	72"	78″	84"	90″	96″	102"	108″	114"	120″
3″	X	X	X	X	Х	X	Х	X	X	X	Х	X	X	X	X	X
10"	X	X	X	X	x	X	X	X	x	X	x	X	x	x	x	x
12″	X	X	X	X	x	X	x	X	x	X	x	x	X	x	X	x
14"	X	X	X	X	x	X	x	X	X	X	x	X	X	x	x	x
16″	X	X	X	X	x	X	x	X	x	X	x	X	X	x	x	x
18″	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
20″	X	X	X	X	X	X	X	X	X	X	X	x	X	X	X	X
22"	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	Х
24"	X	X	X	X	X	X	X	X	X	X	X	x	X	X	X	X
26″	Х	X	X	X	X	X	X	X	X	X	X	X	X	X	X	Х
28″	Х	х	Х	Х	X	Х	X	Х	х	Х	Х	X	X	Х	X	Х
30″	Х	Х	Х	Х	X	Х	Х	Х	Х	Х	Х	х	Х	Х	Х	Х
32″	X	Х	Х	Х	Х	Х	Х	Х	Х	X	х	Х	Х	Х	Х	X
34″	X	Х	Х	Х	Х	Х	Х	Х	Х	X	х	Х	Х	Х	Х	X
36″	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	X
10"	Х	Х	Х	Х	Х	Х	Х	Х	Х	X	Х	Х	Х	Х	Х	X
14"		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	X
18″			Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	X
52″				Х	Х	Х	Х	Х	Х	X	Х	Х	Х	Х	Х	X
56″					X	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	X
60″						Х	X	Х	Х	X	Х	Х	Х	Х	Х	X
66″							X	Х	Х	Х	Х	Х	Х	Х	Х	X
72″								X	Х	X	X	Х	Х	Х	Х	X
78″									Х	X	X	Х	X	X	Х	X
34″										X	X	Х	X	X	Х	X
90″											Х	Х	X	Х	Х	X
96″												Х	X	Х	Х	X
102″													X	Х	Х	X
108″														Х	Х	X
l14″															Х	X
120"																Х

MODEL	MODEL CHART - SERIES STRA CIRCULAR													
Size	8″	10″	12″	14"	16″	18″	20″	22″	24"	26"	28″	32″	36″	40″
	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
Size	44"	48″	54"	60″	66″	72″	78″	84"	90″	96″	102"	108"	114"	120"
	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х

OPTIONS								
To order add suffix:	Description							
-F	Flange (oval stations only)							
-IM	Internal pressure connections (rectangular stations only)							