


ADJUSTABLE AIR FLOW PADDLE SWITCH

Ranges from 200 to 1800 FPM, Stainless Steel Vane, ABS Housing

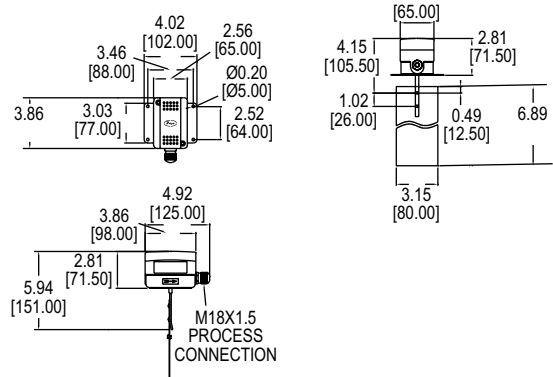

The **Model AAFS Adjustable Air Flow Paddle Switch** is capable of detecting a wide range of air velocities with minimal user calibration. Quality features include a stainless steel vane, galvanized steel base, and ABS enclosure.

BENEFITS/FEATURES

- Adjustable air flow sensitivity from 200 to 1800 FPM
- High current (15 A) rated SPDT contact
- IP65 enclosure rating

APPLICATIONS

- Air flow proving in HVAC systems

MODEL CHART	
Model	Description
AAFS	Adjustable air flow paddle switch

SPECIFICATIONS

Service: Air and compatible gas.

Wetted Materials: Vane: SS; Lever: Brass; Base: Galvanized steel.

Housing: ABS.

Temperature Limits: Ambient: -40 to 180°F (-40 to 85°C); Process: -14 to 185°F (-10 to 85°C).

Humidity Limits: 10 to 90%, non-condensing.

Switch Type: SPDT.

Electrical Rating: 15 (8) A @ 250 VAC.

Electrical Connection: Screw terminal with M18 x 1.5 cable gland.

Process Connection: Flange.

Mounting Orientation: Horizontal duct flow.

Set Point: Internal screw.

Enclosure Rating: IP65.

Weight: 13.6 oz (380 g).

Compliance: CE.

USA: California Proposition 65

WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.