




CONTINUOUS LEVEL TRANSMITTER


Customize To Fit Application, 316 Stainless Steel or Buna-N Floats

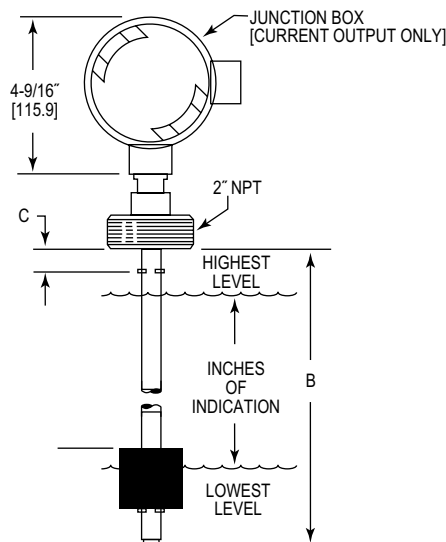


F1 float dimensions




F2 float dimensions




F3 float dimensions




Type 1 mounting dimensions



Type 3 mounting dimensions



Type 2 mounting dimensions



Type 4, 5 mounting dimensions

The **Series CLT Continuous Level Transmitter** provides up to the minute tank level monitoring with a customized level transmitter. Transmitters can be configured for 4-20 mA or proportional voltage output, 316 stainless steel or Buna-N stem and floats, and lengths up to 72" (183 cm).

BENEFITS/FEATURES

- Customized stem length, actuation point, distance between floats, and lead wire lengths
- 4-20 mA or proportional voltage output outputs continuous level indication

APPLICATIONS

- General purpose level monitoring
- Low specific gravity applications
- Gas and oil

SPECIFICATIONS

Service: Compatible liquids.
Resolution: 1/4" (6.35 mm).
Temperature Limits: Buna-N floats: 180°F (82°C) in water, -40 to 230°F (-40 to 110°C) in oil; SS floats: -40 to 230°F (-40 to 110°C).
Pressure Limits: Buna-N floats: 150 psig (10 bar); SS floats: 300 psig (21 bar).
Power Requirements: Proportional voltage output models: 10-30 VDC; 4-20 mA output models: 10-40 VDC.
Loop Resistance: 1.4k Ω max.
Electrical Connections: Proportional voltage output: 24" (61 cm) free leads #22 AWG, TFE jacketed; 4-20 mA output: Junction box.
Enclosure Rating: 4-20 mA models, NEMA 4 (IP56) junction box.
Mounting Orientation: Vertical ±20°.

MODEL CHART									
Example	CLT	-V	S	5	F3	-20.25	-02.00	-25.75	CLT-VS5F3-20.25-02.00-25.75
Construction	CLT								Continuous level transmitter
Output		V							Voltage, proportional signal of 0 to supply voltage
		C							4-20 mA (junction box provided)
Stem and Connection Material			B						Brass with beryllium copper stops
			S						316 SS with SS ARMCO PH-15-7MO stops
Connection Type				1					1/2" NPT (output type V only)
				2					1-1/4" NPT (float F1 only)
				3					2" NPT
				4					3" 150# flange, carbon steel (connection material S only) [max. pres. 150 psi (10.3 bar)]
				5					3" 150# flange, 316 SS (connection material S only) [max. pres. 150 psi (10.3 bar)]
Float Type					F1				Material
					F2				Buna-N
					F3				0.55
									150 psi (10.3 bar)
									0.55
									150 psi (10.3 bar)
									0.75
									300 psi (20.7 bar)
									3.5" (52.4 mm)
Indication Length						00.00			Length that the unit sends an output for level, maximum is 68" (173 cm)
Top Float Stop "C"							00.00		Distance from bottom of mounting connection to upper float stop, minimum is 1/4" (6.4 mm)
Dimension Overall Length "B"								00.00	To calculate overall length, add indication length, top float, stop dimension "C", and float factor, maximum length is 72" (1.82 m)

Note: Models are built to your specifications.

USA: California Proposition 65
WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.